TECHNICAL DATA SHEET
DECORATIVE PANELS

REFERENCE **PD001_LLIS**

DESCRIPTION Plain, no machining

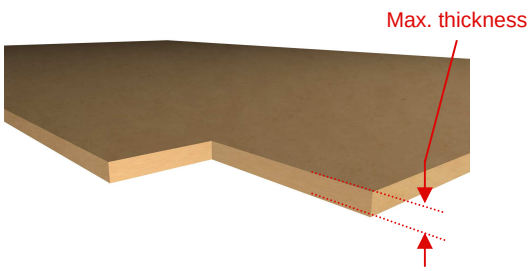

FEATURES

Materials
- ♦ Damp-proof MDF
- ♦ Damp-proof mass tinted MDF
- ♦ Wood
- ♦ Acrylic resin

Max. thickness(mm)
- ♦ 16/22/47 mm (MDF)
- ♦ 12,3 mm (acrylic resin)

For other materials and thickness, contact with DECUSTIK

Max. depth (mm)
- ♦ 0 mm

Fireproofing according to EN 13501-1
- ♦ D - s2, d0 (MDF)
- ♦ C - s1, d0 (acrylic resin)

For other grades and materials, contact with DECUSTIK

Density (kg/m^2) ([1])
- ♦ 12/16,5/35,3 (MDF)
- ♦ 21,5 (acrylic resin)

Sizes
- ♦ Standard dimension 2400x1200mm (MDF)
- ♦ Max. dimension 3000x1500mm (MDF)

For other dimensions and materials, contact with DECUSTIK

Finishing
- ♦ Ecru
- ♦ Varnished ([2])([3])
- ♦ Polylaminated
- ♦ White lacquered/color ([2])([3])([5])-according to RAL colour chart
- ♦ Metallic lacquered ([2])([3])([5]) - according to RAL colour chart
- ♦ Polished ([4])

Edge machining
- ♦ Viewed
- ♦ Grooving
- ♦ Dovetailing

APPLICATIONS
- ♦ Wall covering
- ♦ Ceiling
- ♦ Furniture accessories

ACCESSORIES FOR ASSEMBLY

Edge profiles
- ♦ Edge profiles, corners and ends (wall covering)
- ♦ Trims (wall covering and ceilings)
- ♦ 45º angle

Fixing system
- ♦ Ceiling: standard system for semi-hidden and hidden edge machining
- ♦ Wall covering: standard system according to edge machining
  - viewed
  - grooving
  - dovetailing

NOTES

(1) Values corresponding to indicated thickness without additional elements nor attachments

(2) Available in normal and fire-proof quality

(3) Not applicable to acrylic resins

(4) Applicable only to acrylic resins

(5) Matt, satin or glossy finishing