


REFERENCE MICRO_05_01
DESCRIPTION Acoustic panels Microperforated

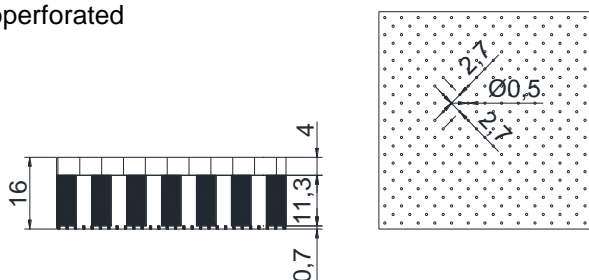


ACOUSTIC FEATURES

Pitch (mm) 2.7x2.7
Diagonal
Hole diameter (mm) Ø 0.5
Hole depth (mm) 0.7
Perforated area (%) 2.7

Sound absorption

Plenum 50mm α_w 0.85
Plenum 200mm α_w 0.80
Absorption class B
Mineral wool behind 45mm
21kg/m³

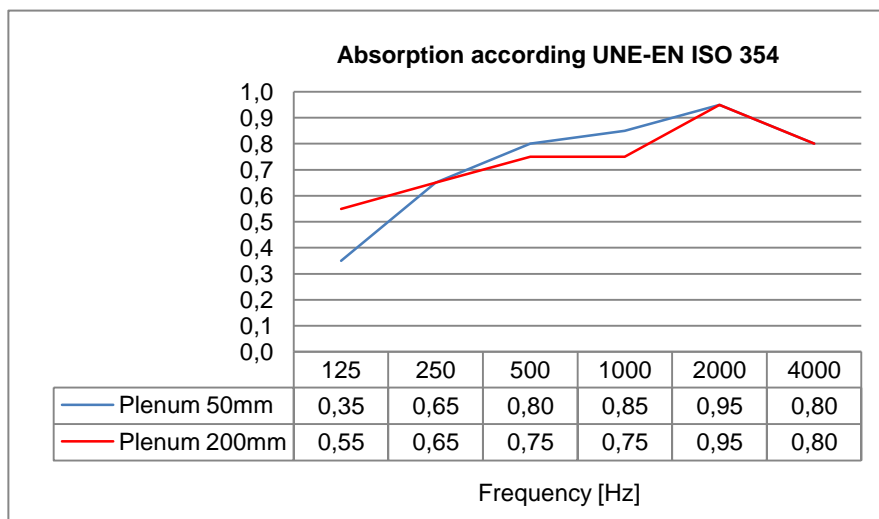

GENERAL FEATURES

Materials MDF standard D-s2.d0
MDF fireproof B-s2.d0 (with red or natural core)
MDF coloured throughout D-s2.d0
MDF coloured throughout B-s2.d0

Thickness (mm) 16mm (MDF).
For other materials and thickness, contact DECUSTIK

Approximate weight (kg/m²) 10.0 (MDF standard 16mm) 12.5 (MDF Fireproof 16mm)

Panel sizes (mm) 2400x600 / 1200x600 / 600x600
For other dimensions, contact with DECUSTIK

Finishing With no finish Natural wood veneer
Lacquered RAL Melamine
For other finishing, contact with DECUSTIK

Acoustic veil On the backside

APPLICATION

