


**REFERENCE** D+008

**DESCRIPTION** Acoustic slat with grooves on viewed face and holes on the back side

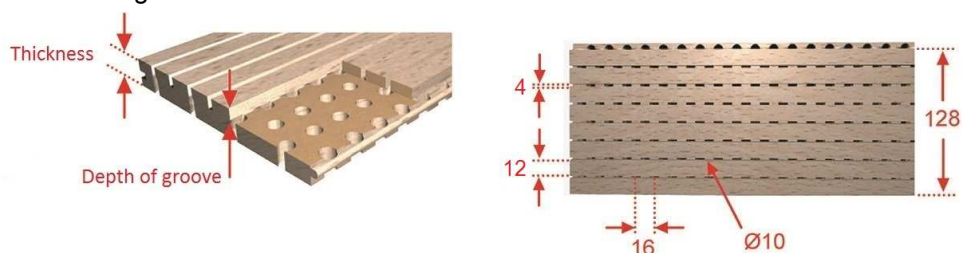

**ACOUSTIC FEATURES**

Distance between grooves (mm) 12

Width of groove (mm) 4

Depth of groove (mm) 6

Diameter of hole (mm) Ø 10

Pitch of hole (mm) 16

Depth of hole (mm) 10

Perforated area (%) 15.1


**Acoustic absorption**

Plenum 50mm  $\alpha_w$  0.95

Plenum 200mm  $\alpha_w$  0.90

Absorption class A

Mineral wool 40mm  
21kg/m<sup>3</sup>

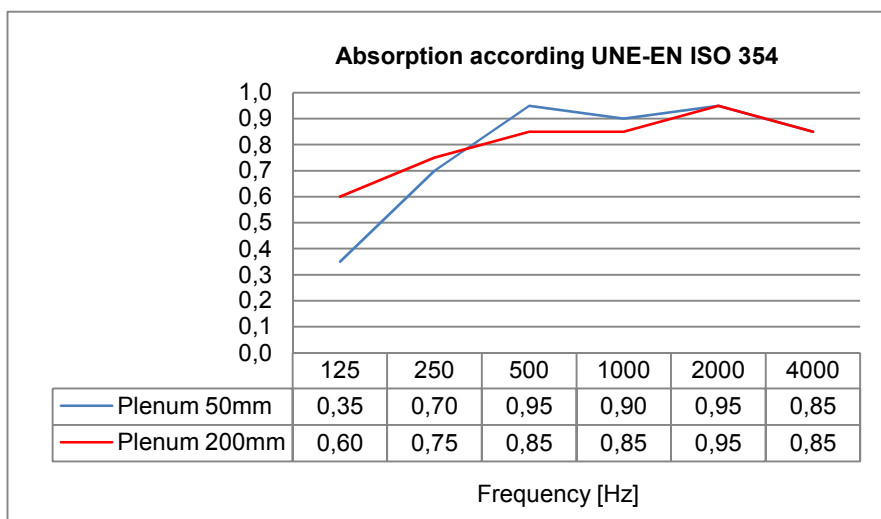

**GENERAL FEATURES**

Materials

MDF standard D-s2.d0  
MDF fireproof B-s2.d0 (with red or natural core)  
MDF coloured throughout D-s2.d0  
MDF coloured throughout B-s2.d0

Thickness(mm)

16mm (MDF).  
For other materials and thickness, contact with DECUSTIK

Approximate weight (kg/m<sup>2</sup>)

10.0 (MDF standard 16mm)      12.5 (MDF fireproof 16mm)

Sizes (mm)

2430x128  
For other dimensions, contact with DECUSTIK

Finishing

With no finish      Natural wood veneer  
Lacquered to RAL chart      High pressure laminate (HPL)      Melamine  
For other finishing, contact with DECUSTIK

Edge machining

Tongue and groove D+



**APPLICATIONS**

Wall coverings  
Ceiling

**ACCESORIES**

Wall coverings : Omega metallic profiles / Clips / Wood battens  
Ceiling : Standard system T24 / Clips