


REFERENCE PE023
DESCRIPTION Slatted panel with 90x20mm slats spaced 110mm


ACOUSTIC FEATURES

Slat section (mm) 90x20
Slat spacing (mm) 110
Panel thickness (mm) 43
Perforated area (%) 50

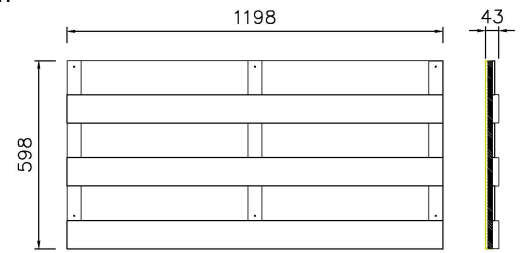

Acoustic absorption

Plenum	α_w	NRC	Class
19mm	0,60	0,60	C
40mm	0,60	0,60	C
40mm (+)	0,60	0,65	C
200mm	0,55	0,55	D
200mm (+)	0,60	0,65	C

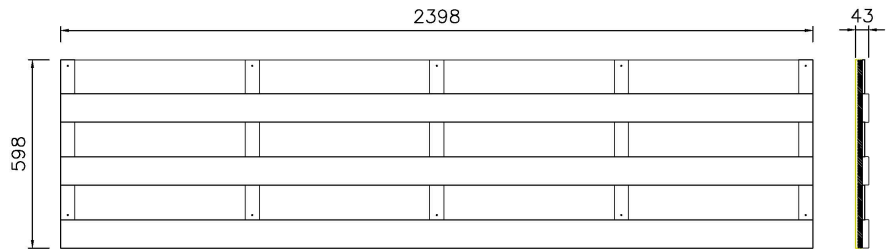

Mineral Wool (integrated) 15 mm 70 kg/m³
Additional Mineral Wool inside the plenum (+) 45 mm 21 kg/m³

GENERAL FEATURES

Base material of slats


MDF standard D-s2,d0
MDF fireproof B-s2,d0
Solid wood

Base material of crossies

MDF standard D-s2,d0
MDF fireproof B-s2,d0

For other materials and thickness, contact DECUSTIK

Absorption according UNE-EN ISO 354

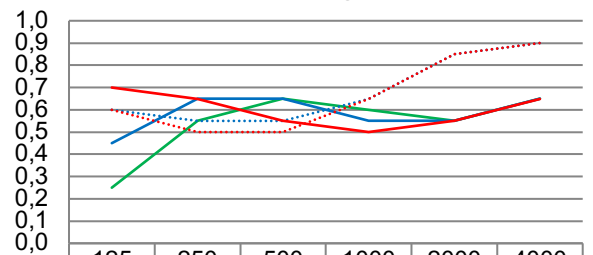

	125	250	500	1000	2000	4000
— Plenum 19mm	0,25	0,55	0,65	0,60	0,55	0,65
— Plenum 40mm	0,45	0,65	0,65	0,55	0,55	0,65
⋯ Plenum 40mm (+)	0,60	0,55	0,55	0,65	0,85	0,90
— Plenum 200mm	0,70	0,65	0,55	0,50	0,55	0,65
⋯ Plenum 200mm (+)	0,60	0,50	0,50	0,65	0,85	0,90

Weight approx. (kg/m²)

8,7 (MDF Standard)
9,9 (MDF Fireproof)
8,2 (Spruce)
8,3 (Pine)
9,1 (Oak)

Sizes (mm)

For wall and ceiling
2400x600 (2398x598 real)
1200x600 (1198x598 real)
Designed to install with a 2mm clearance between panels
For other dimensions, consult


Finishing

Varnished natural wood veneer
Solid varnished natural wood
CPL Lacquered
CPL decorative design
For other finishes, consult

APPLICATION


Wall coverings

Screwed to batten

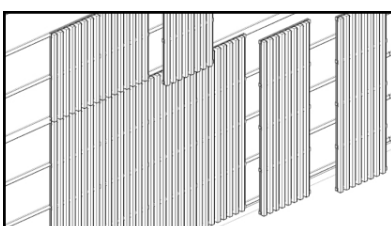

Ceilings

Screwed to T60 profile

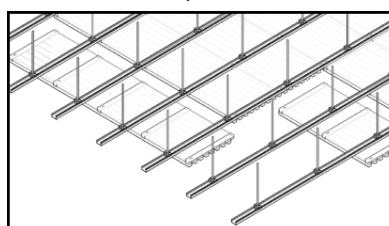

Important note: Due to the weight of some models and especially in ceiling mounting, it is essential to ensure that the structure and anchors support the weight of the panels.