


REFERENCE D+006

DESCRIPTION Acoustic slat with grooves on viewed face and holes on the back side

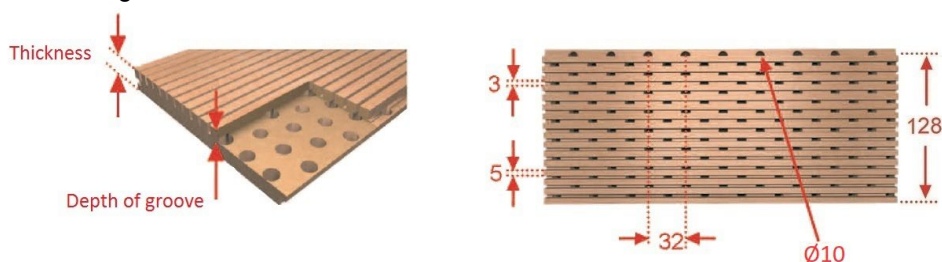


ACOUSTIC FEATURES


- Distance between grooves (mm) 5
- Width of groove (mm) 3
- Depth of groove (mm) 6
- Diameter of hole (mm) Ø 10
- Pitch of hole (mm) 32
- Depth of hole (mm) 10
- Perforated area (%) 11.4

Acoustic absorption

- Plenum 40mm α_w 0.80
- NRC 0.85
- Plenum 200mm α_w 0.75
- NRC 0.85
- Absorption class B/C
- Mineral wool 40mm
- 30kg/m³

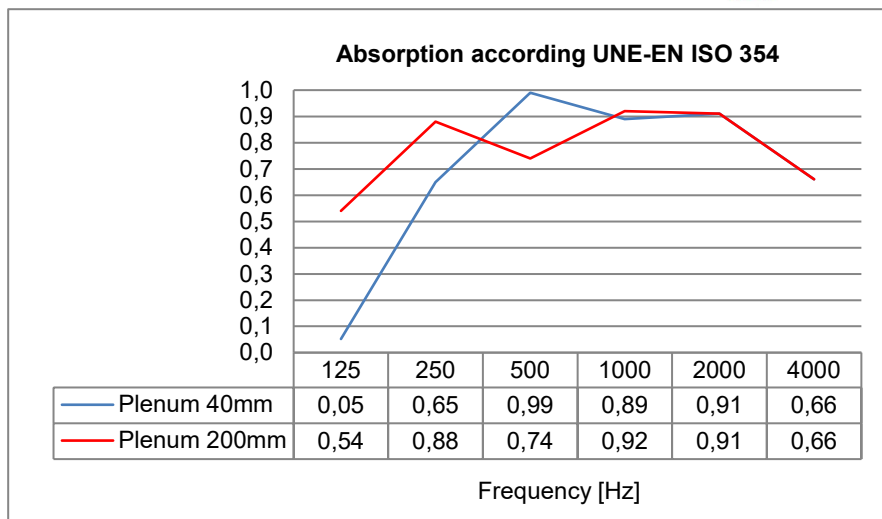

GENERAL FEATURES

- Materials
 - MDF standard D-s2.d0
 - MDF fireproof B-s1.d0 (with red or natural core)
 - MDF coloured throughout D-s2.d0
 - MDF coloured throughout B-s1.d0
- Thickness(mm) 16mm (MDF)
For other materials and thickness, contact with DECUSTIK
- Approximate weight (kg/m²) 10.0 (MDF standard 16mm) 12.5 (MDF fireproof 16mm)
- Sizes (mm) 2400x128
For other dimensions, contact with DECUSTIK
- Finishing
 - With no finish Natural wood veneer
 - Lacquered to RAL chart High pressure laminate (HPL) Melamine
 - For other finishing, contact with DECUSTIK
- Edge machining Tongue and groove D+ 

APPLICATIONS

- Wall coverings
- Ceiling

ACCESORIES

- Wall coverings: Omega metallic profiles / Clips / Wood battens
- Ceiling: Standard system T24 / Clips