


**REFERENCE** D+003

**DESCRIPTION** Acoustic slat with grooves on viewed face and holes on the back side

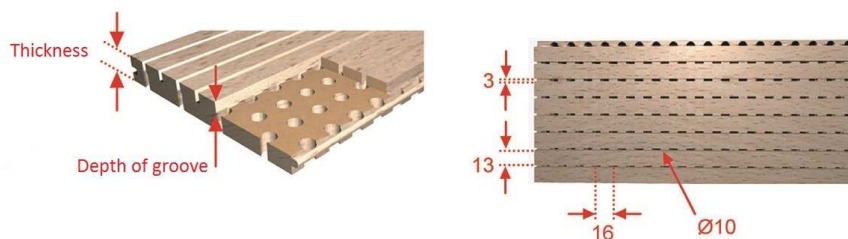


**ACOUSTIC FEATURES**

Distance between grooves (mm) 13  
 Width of groove (mm) 3  
 Depth of groove (mm) 6  
 Diameter of hole (mm) Ø 10  
 Pitch of hole (mm) 16  
 Depth of hole (mm) 10  
 Perforated area (%) 11.5

**Acoustic absorption**

Plenum 50mm  $\alpha_w$  0.95  
 Plenum 200mm  $\alpha_w$  0.90  
 Absorption class A  
 Mineral wool 40mm  
 21kg/m<sup>3</sup>

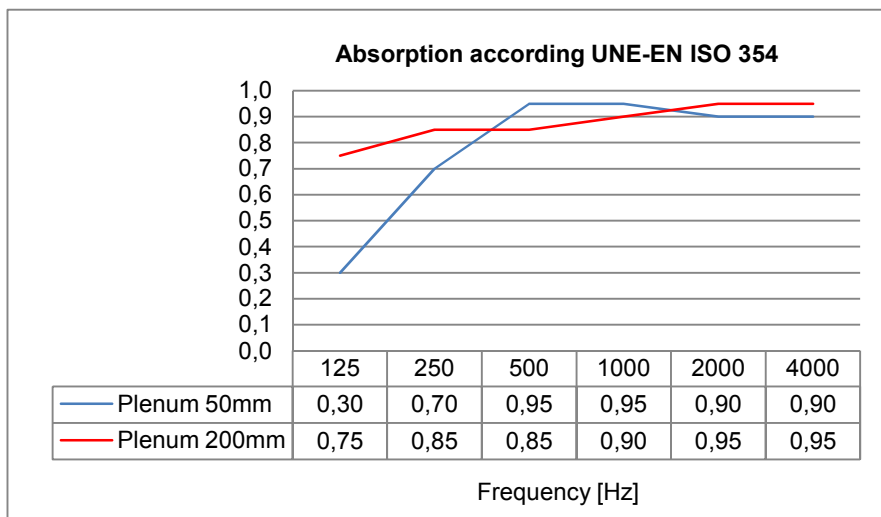

**GENERAL FEATURES**


**Materials** MDF standard D-s2.d0  
 MDF fireproof B-s2.d0 (with red or natural core)  
 MDF coloured throughout D-s2.d0  
 MDF coloured throughout B-s2.d0

**Thickness(mm)** 16mm (MDF).  
 For other materials and thickness, contact with DECUSTIK

**Approximate weight (kg/m<sup>2</sup>)** 10.0 (MDF standard 16mm)      12.5 (MDF fireproof 16mm)

**Sizes (mm)** 2430x128  
 For other dimensions, contact with DECUSTIK

**Finishing** With no finish      Natural wood veneer  
 Lacquered to RAL chart      High pressure laminate (HPL)      Melamine  
 For other finishing, contact with DECUSTIK

**Edge machining** Tongue and groove D+ 

**APPLICATIONS** Wall coverings  
 Ceiling

**ACCESORIES** Wall coverings : Omega metallic profiles / Clips / Wood battens  
 Ceiling : Standard system T24 / Clips