


**REFERENCE** D+004

**DESCRIPTION** Acoustic slat with grooves on viewed face and holes on the back side

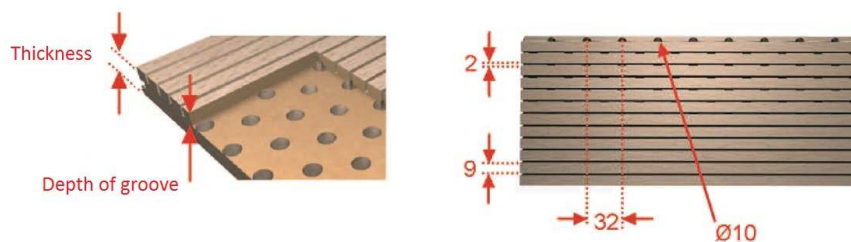


**ACOUSTIC FEATURES**


- Distance between grooves (mm) 9
- Width of groove (mm) 2
- Depth of groove (mm) 6
- Diameter of hole (mm) Ø 10
- Pitch of hole (mm) 32
- Depth of hole (mm) 10
- Perforated area (%) 5.2

**Acoustic absorption**

- Plenum 40mm  $\alpha_w$  0.60
- NRC 0.85
- Plenum 200mm  $\alpha_w$  0.60
- NRC 0.80
- Absorption class C
- Mineral wool 40mm
- 30kg/m<sup>3</sup>

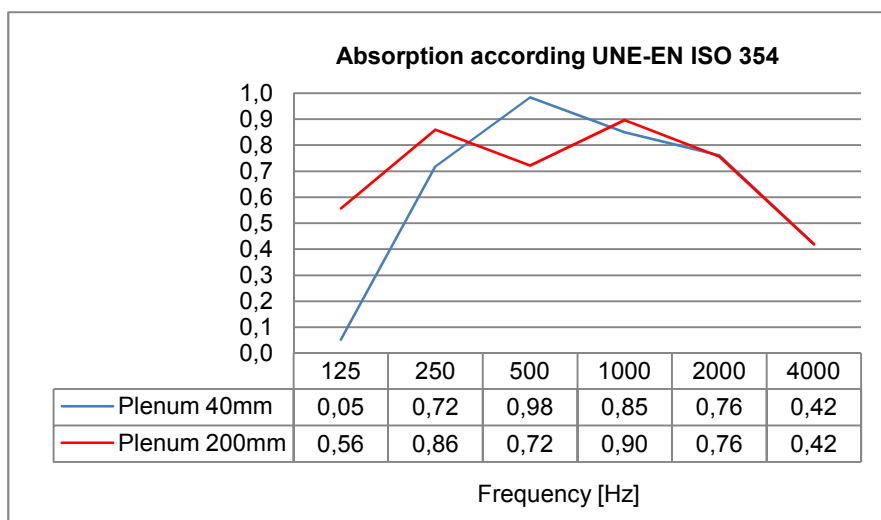

**GENERAL FEATURES**

- Materials
  - MDF standard D-s2.d0
  - MDF fireproof B-s2.d0 (with red or natural core)
  - MDF coloured throughout D-s2.d0
  - MDF coloured throughout B-s2.d0
- Thickness(mm) 16mm (MDF).  
For other materials and thickness, contact with DECUSTIK
- Approximate weight (kg/m<sup>2</sup>) 10.0 (MDF standard 16mm)      12.5 (MDF fireproof 16mm)
- Sizes (mm) 2430x128  
For other dimensions, contact with DECUSTIK
- Finishing
  - With no finish      Natural wood veneer
  - Lacquered to RAL chart      High pressure laminate (HPL)      Melamine
  - For other finishing, contact with DECUSTIK
- Edge machining Tongue and groove D+ 

**APPLICATIONS**

- Wall coverings
- Ceiling

**ACCESORIES**

- Wall coverings : Omega metallic profiles / Clips / Wood battens
- Ceiling : Standard system T24 / Clips