



REFERENCE **PAR058**
DESCRIPTION Acoustic panel with aligned grooves

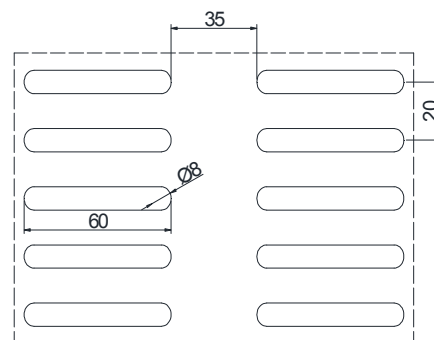

ACOUSTIC FEATURES

Pitch (mm) 20x35
 Aligned
Groove (mm) Ø 8 x 60
Hole depth (mm) Through
Perforated area (%) 21.0
Sound absorption
Plenum 40mm α_w 0.60
 NRC 0.85
Plenum 200mm α_w 0.70
 NRC 0.80
Absorption class C
Mineral wool behind 40mm
 30kg/m³

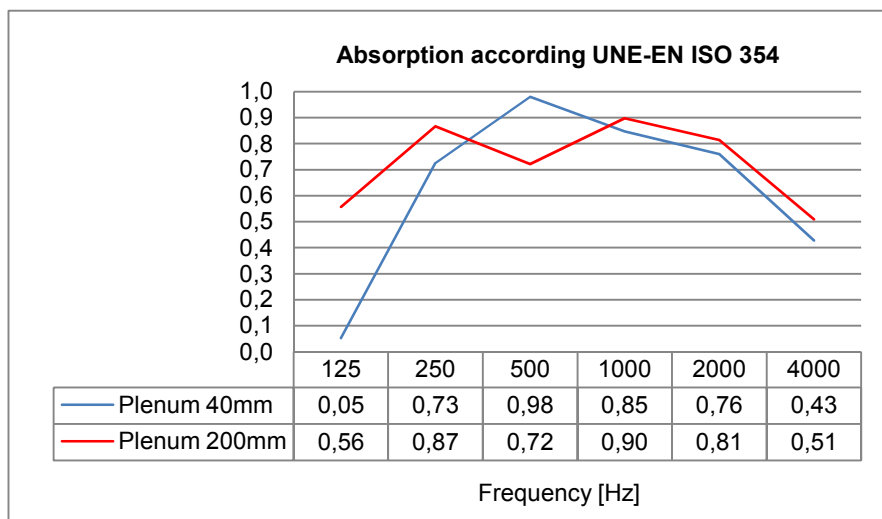

GENERAL FEATURES

Materials MDF standard D-s2.d0
 MDF fireproof B-s2.d0 (with red or natural core)
 MDF coloured throughout D-s2.d0
 MDF coloured throughout B-s2.d0

Thickness (mm) 16mm and 12mm (MDF).
 For other materials and thickness, contact DECUSTIK

Approximate weight (kg/m²) 7.5 (MDF standard 12mm) 9.5 (MDF Fireproof 12mm)
 10.0 (MDF standard 16mm) 12.5 (MDF Fireproof 16mm)

Panel sizes (mm) MDF 12mm: 1200x600 / 600x600
 MDF 16mm: 2400x600 / 1200x600
 For other dimensions, contact with DECUSTIK



Finishing With no finish Natural wood veneer
 Lacquered RAL High pressure laminate (HPL) Melamine
 For other finishing, contact with DECUSTIK

APPLICATION

Wall coverings (MDF 16mm)

Ceilings (MDF 12mm)

Straight visible 
Loose tongue 

Straight visible 
Semi concealed 
Concealed movable 