


REFERENCE

D+011

DESCRIPTION

Slotted acoustic panel on the visible face and perforated on the rear face, backed with acoustic fleece.

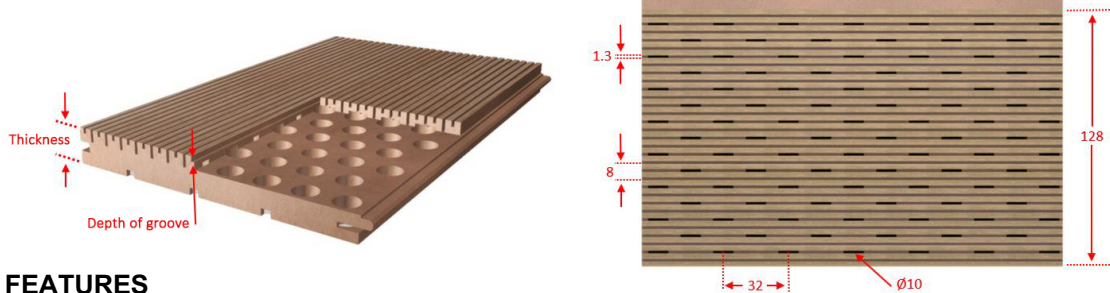

ACOUSTIC FEATURES

Distance between grooves (mm) 4

Width of groove (mm) 1.3

Depth of groove (mm) 6 / 2.5

Diameter of hole (mm) Ø 10

Pitch of hole (mm) 32

Depth of hole (mm) 10

Perforated area (%) 5,2

Acoustic absorption

Plenum 40mm α_w 0,60

NRC 0,85

Plenum 200mm α_w 0,60


NRC 0,80

Absorption class C

Mineral wool 45mm

21kg/m³

Absorption according UNE-EN ISO 354

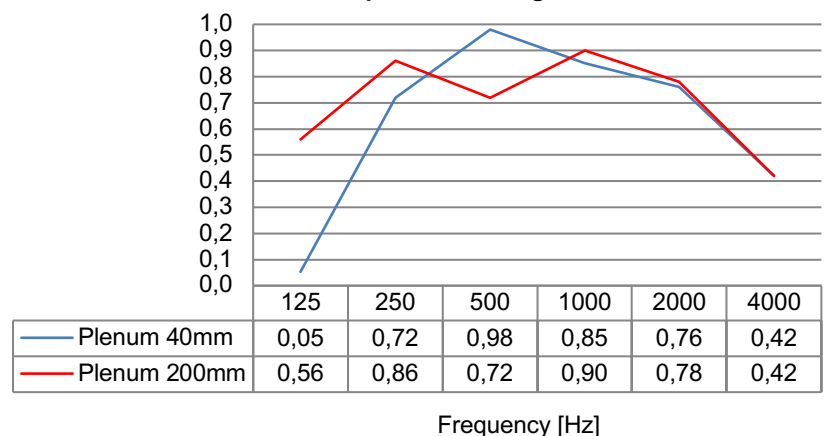

GENERAL FEATURES

Materials

MDF standard D-s2.d0

MDF fireproof B-s1.d0 (with red or natural core)

MDF coloured throughout D-s2.d0

MDF coloured throughout B-s2.d0

Thickness (mm)

16mm (MDF).

For other materials and thickness, contact with DECUSTIK

Approximate weight (kg/m²)

10,0 (MDF standard 16mm)

12,5 (MDF fireproof 16mm)

Sizes (mm)

2400x128

For other dimensions, contact with DECUSTIK

Finishing

With no finish

Natural wood veneer

Lacquered to RAL chart High pressure laminate (HPL)

Melamine

For other finishing, contact with DECUSTIK

Edge machining

Tongue and groove D+



APPLICATIONS

Wall coverings

Ceiling

ACCESORIES

Wall coverings: Omega metallic profiles / Clips / Wood battens

Ceiling: Standard system T24 / Clips