


REFERENCE
DESCRIPTION

D+E01

Acoustic slat with grooves and slats on the visible side, perforated on the back with an acoustic fleece.

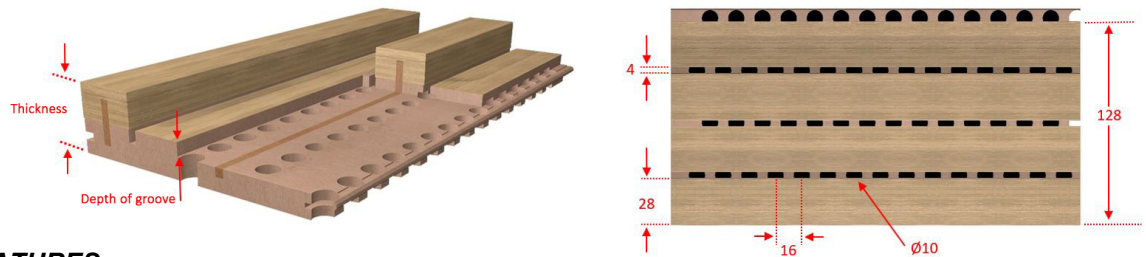


ACOUSTIC FEATURES

Distance between grooves (mm)	29
Width of groove (mm)	3
Depth of groove (mm)	6
Diameter of hole (mm)	Ø 10
Pitch of hole (mm)	16
Depth of hole (mm)	10
Perforated area (%)	4,7

Acoustic Absorption

Plenum 50mm	α_w	0,60
	NRC	0,65
Plenum 200mm	α_w	0,60
	NRC	0,60
Absorption Class		C
Mineral Wool		45mm
		21kg/m ³

Absorption according to UNE-EN ISO 354

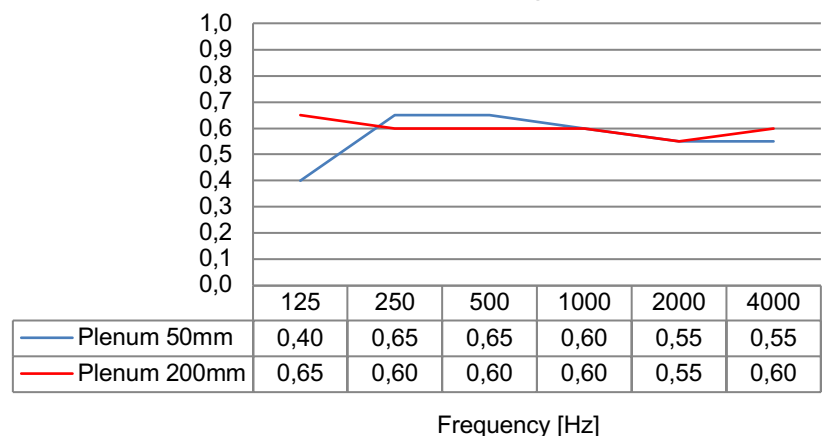

GENERAL FEATURES

Materials	MDF standard D-s2.d0 MDF fireproof B-s1.d0 (with red or natural core) MDF coloured throughout D-s2.d0 MDF coloured throughout B-s2.d0	
Thickness (mm)	32mm (MDF). Other materials and thicknesses available upon request.	
Approximate weight (kg/m ²)	15,0 (MDF Standard 16mm)	18,5 (MDF fireproof 16mm)
Sizes (mm)	2400x128 Other dimensions upon request	
Finishing	Raw MDF Melamine Lacquered colour RAL Wood Veneer Other finishes available upon request.	
Edge machining	Tongue and Groove D+	

APPLICATIONS

Wall Cladding Ceiling Cladding

ACCESSORIES

Wall coverings: Omega metallic profiles / Wood battens/ Clips
Ceiling: Standard system T24 / Clips