



REFERENCE PAP068
DESCRIPTION Acoustic Panel with alternate holes



ACOUSTIC FEATURES

Pitch (mm)	8x16
	Alternate
Hole diameter (mm)	Ø 8
Hole depth (mm)	Through
Perforated area (%)	39,0
Sound Absorption	
Plenum 40mm α_w	0,85
NRC	0,90
Plenum 200mm α_w	0,80
NRC	0,85
Absorption class	B
Mineral wool behind	40mm
	30kg/m ³

Absorption according UNE-EN ISO 354

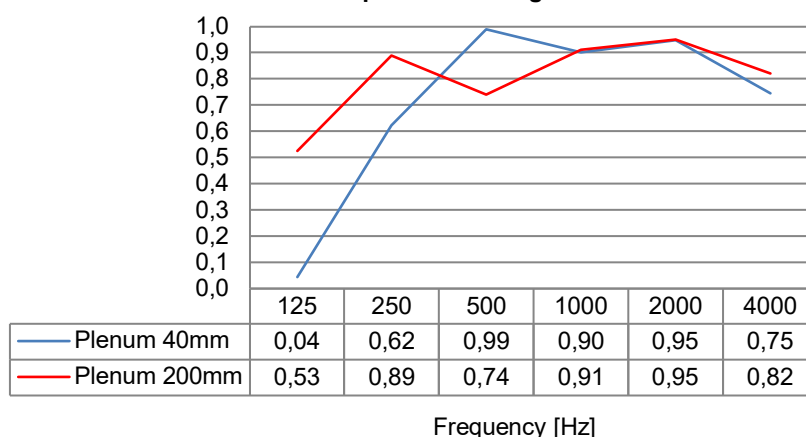

GENERAL FEATURES

Materials	MDF Standard D-s2,d0 MDF Fireproof B-s1,d0 (with red or natural core) MDF coloured throughout D-s2,d0 MDF coloured throughout B-s2,d0		
Thickness (mm)	16mm and 12mm (MDF) For other materials and thickness, contact DECUSTIK		
Approximate weight (kg/m ²)	7,5 (MDF Standard 12mm) 10,0 (MDF Standard 16mm)	9,5 (MDF Fireproof 12mm) 12,5 (MDF Fireproof 16mm)	
Panel Sizes(mm)	MDF 12mm: 600x600 / 1200x600 MDF 16mm: 2400x600 / 1200x600 For other dimensions, contact with DECUSTIK		
Finishing	Without Finish Natural Wood Veneer Lacquered RAL High Pressure Laminate (HPL) Melamine For other Finishing, contact with DECUSTIK		

APPLICATION

Wall coverings (MDF 16mm)

Straight Visible	
Loose Tongue	

Ceilings (MDF 12mm)

Straight Visible	
Semi concealed	
Concealed movable v6	